THE NEW GLOBAL POWER FOR ELECTROMAGNETIC COMPATIBILITY.

THE WORLD'S SPEED IS OUR BEAT



MILMEGA 'AS' Series Solid State Amplifier Range

Model: AS0860-150/90 Dual Band Amplifier




The AS0860 series of solid state power amplifiers follows the MILMEGA tradition for compact, upgradeable microwave power amplifier solutions with field proven reliability.

Developed to cover the frequency band 0.8- 6.0GHz in two bands (0.8 GHz to 2.5 GHz and 2.5 GHz to 6.0 GHz)

Where the transition from the low band to the high band amplifier should take place at a different frequency, please see either the AS0860A range (0.8 GHz to 2.7 GHz and 1.8 GHz to 6.0 GHz) or AS0860B range (0.8 GHz to 2.2 GHz and 1.8 GHz to 6.0 GHz)

- Calibrated Dual Directional Coupler fitted as standard
- ➤ Ethernet, USB and RS232 or GPIB and RS232 included in price
- Unique 5 year parts and labour warranty on all MILMEGA amplifiers.

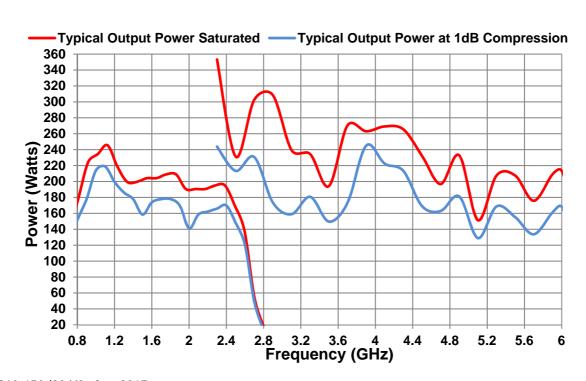

DS-AS0860-150/90 V2. Aug 2017

Amplifier Specification

| Band Dependant Parameters | 0.8 to 2.5GHz | 2.5 to 6.0GHz | |
|---------------------------------|---------------|---------------|--|
| Psat (min) | 175 W | 125 W | |
| P1dB (min) | 150 W | 90 W | |
| Gain (min) | 47.8dB | 45.6dB | |
| Gain Variation (max) | +/- 2.5dB | +/-3dB | |
| Harmonics at P1dB | -20dBc | -20dBc | |
| Third order intercept point IP3 | 10dB > P1dB | 8dB> P1dB | |
| | | | |

| System Parameters | | |
|--------------------------|------------------------------------|--|
| Input Power (no damage) | +15 dBm | |
| Output VSWR tolerance | Infinite any phase | |
| Stability | Unconditional | |
| Output impedance | 50 Ohm | |
| Output VSWR | 2:1 typical | |
| Input VSWR | 2:1 max | |
| Spurious | -70 dBc (max) -80 dBc (typical) | |
| Noise figure | 8.0 dB | |
| Safety interlock | Via rear panel BR2 connector | |
| Supply Voltage - 1 Phase | 90 to 132 or 180 to 240 VAC +/-10% | |
| Supply Frequency | 50 to 60 Hz | |
| Supply Power | <2 kVA | |
| RF Input | Type N female | |
| RF Output | Type N female | |
| Dimension | 19 inch, 12U case, 527mm Deep | |
| Weight | 130 kg | |

Amplifiers that meet today's and tomorrow's needs through upgradability.



MILMEGA

RF/Microwave Amplifiers

Specifications subject to change without notice. MILMEGA is an ISO accredited Company. Products are designed and manufactured under strict quality and environmental requirements of ISO 9001.