

## THE NEW GLOBAL POWER FOR ELECTROMAGNETIC COMPATIBILITY.

THE WORLD'S SPEED IS OUR BEAT



## MILMEGA 'AS' Series Solid State Amplifier Range

Model: AS0860A-100/50 Dual Band Amplifier




- Calibrated Dual Directional Coupler fitted as standard
- ➤ Ethernet, USB and RS232 or GPIB and RS232 included in price
- Unique 5 year parts and labour warranty on all MILMEGA amplifiers.

The AS0860A series of solid state power amplifiers follows the MILMEGA tradition for compact, upgradeable microwave power amplifier solutions with field proven reliability.

Developed to cover the frequency band 0.8- 6.0GHz in two bands (0.8 GHz to 2.7 GHz and 1.8 GHz to 6.0 GHz) they are ideal for EMC testing where a lower field is required above 2.7GHz.

Where the transition from the low band to the high band amplifier can take place at a lower frequency, please see either the lower cost AS0860 range (0.8 GHz to 2.5 GHz and 1.8 GHz to 6.0 GHz) or AS0860B range (0.8 GHz to 2.2 GHz and 1.8 GHz to 6.0 GHz)

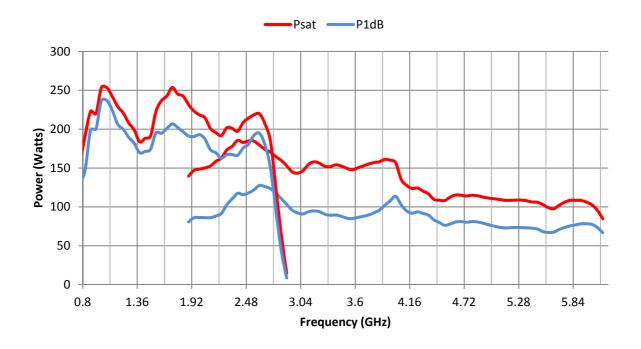

DS-AS0860A-100/50 V.1

## **Amplifier Specification**

0.8 to 2.7 GHz	1.8 to 6.0GHz	
120 W	80 W	
100 W	50W	
46dB	43dB	
+/- 2.0dB	+/-3dB	
-18 dBc	-20dBc	
10dB > P1dB	8dB> P1dB	
8.0dB	8.0 dB	
	120 W 100 W 46dB +/- 2.0dB -18 dBc 10dB > P1dB	120 W 80 W 100 W 50W 46dB 43dB +/- 2.0dB +/-3dB -18 dBc -20dBc 10dB > P1dB 8dB> P1dB

System Parameters		
Input Power (no damage)	+15 dBm	
Output VSWR tolerance	Infinite any phase	
Stability	Unconditional	
Output impedance	50 Ohm	
Output VSWR	2:1	
Input VSWR	2:1	
Spurious	-70 dBc (min) -80 dBc (typical)	
Safety interlock	Via rear panel D-sub connector	
Supply Voltage - 1 Phase	90 to 132 or 180 to 240 VAC	
Supply Frequency	47 to 60 Hz	
Supply Power	<2.0 kVA (typical full power)	
RF Input	Type N female	
RF Output	Type N female	
Dimension	19 inch, 6U case, 527mm Deep	
Weight	52 kg	

Amplifiers that meet today's and tomorrow's needs through upgradability.



MILMEGA

RF/Microwave Amplifiers

Specifications subject to change without notice. MILMEGA is an ISO accredited Company. Products are designed and manufactured under strict quality and environmental requirements of ISO 9001.